


**PTFE KOMPENZÁTOR
KOMP1003-PTFE**

DN 25 - 500

PN 10/16

KATALÓGUS

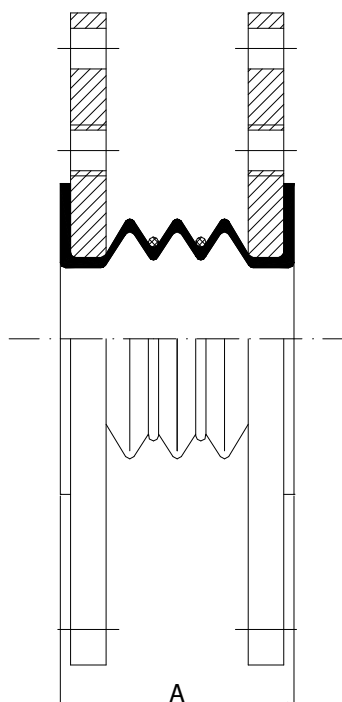

ANYAGTÁBLÁZAT:

| DN | Beépítési méret | Elmozdulás | | | Vákumállóság | | Csatlakozás karima DIN2501 PN10/16 | PTFE hullám vastagság |
|-----|-----------------|------------------|--------------------|-----------------|--------------|--------|--|-----------------------|
| | A(mm) | axiális ±(mm) | laterális ±(mm) | anguláris ±° | Torr | max °C | db x furat | (mm) |
| 25 | 45 | | | | | | | |
| 32 | 50 | | | | | | | |
| 40 | 50 | | | | | | | |
| 50 | 70 | | | | | | | |
| 65 | 80 | | | | | | | |
| 80 | 95 | | | | | | | |
| 100 | 95 | | | | | | | |
| 125 | 100 | | | | | | | |
| 150 | 120 | | | | | | | |
| 200 | 130 | | | | | | | |
| 250 | 130 | | | | | | | |
| 300 | 145 | | | | | | | |
| 350 | 150 | | | | | | | |
| 400 | 155 | | | | | | | |
| 500 | 160 | | | | | | | |